

Technical specifications

## LOGOMATIC Applicator | P

### All-rounder for pallet labelling

- » Extreme robust design
- » Integrated blow-on function

# LOGOMATIC Applicator | P

Telescope applicator for pallet labelling.

### Label format

- » Min.: 74 × 74 mm (W × H)
- » Max.: 300 × 420 mm (W × H)
- » Other formats upon request!

### Applicator

- » Labelling of stopped products
- » Realtime labelling: no printed labels in between
- » Up to 240 pallets/h
- » Suitable for tertiary- and pallet labelling

### Net stroke (P) Series 800

- » Standard: 500 mm
- » Min.: 300 mm
- » Max.: 500 mm

### Net stroke (P) Series 900

- » Standard: 800 mm
- » Min.: 300 mm
- » Max.: 1.000 mm


### Standard functions

- » Integrated position sensors
- » Adjustable stroke limiter
- » Flow control valve for fine adjustment
- » External signal telescope-home position
- » Compressed air monitoring
- » Vacuum monitoring

### Options

- » Flexo-pad
- » 1x additional pressing stroke integrated in vacuum pad
- » 4x additional pressing stroke integrated in vacuum pad
- » Brake-cylinder for positioning
- » Vericoder for verification according ISO-norm
- » Scanner for barcode validation
- » Product sensor

### Orientation

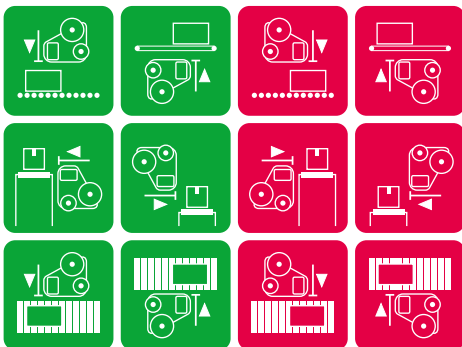


■ Operating side right 
 ■ Operating side left  
■ not available


### Machine compatibility to series

	100	300	400	500	700	800	900
	-	-	-	-	-	✓	✓
	R/L	R/L	R	R/L	R/L	R/L	R

### Application

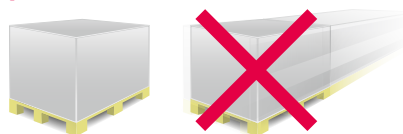

### Cycle rate with standard stroke

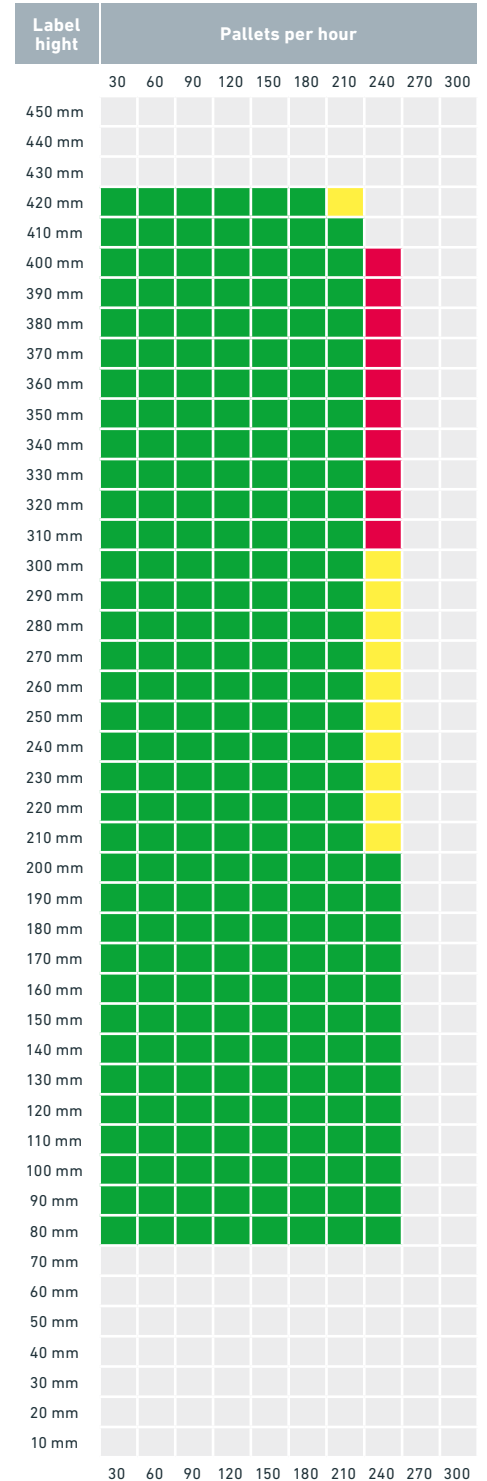

■ Standard 
 ■ Advance 
 ■ High speed