

Technical specifications

LOGOMATIC Applicator | TB HS

For high speed real-time labelling

- » Extreme robust design
- » Integrated blow-on function

LOGOMATIC Applicator | TB HS

Short stroke applicator with vacuum-pad and blow-on function.

Label format

- » Min.: 35 × 30 mm (W × H)
- » Max.: 165 × 105 mm (W × H)
- » Other formats upon request!

Applicator

- » Labelling in moving condition or while product is stopped
- » Realtime labelling: no printed labels in between
- » Up to 80 labels / min
- » Suitable for primary- and secondary labelling

Net stroke (TB-HS)

- » Standard: 15 mm
- » Min.: 5 mm
- » Max. (except Series 300): 90 mm

Net stroke (TB-HS) Series 300

- » Standard: 30 mm


Standard functions

- » Integrated position sensors
- » Flow control valve for fine adjustment
- » Compressed air monitoring
- » Vacuum monitoring

Options


- » Vericoder for verification according ISO-norm
- » Scanner for barcode validation
- » Product sensor
- » Passive sponge roller

Cycle rate with standard stroke

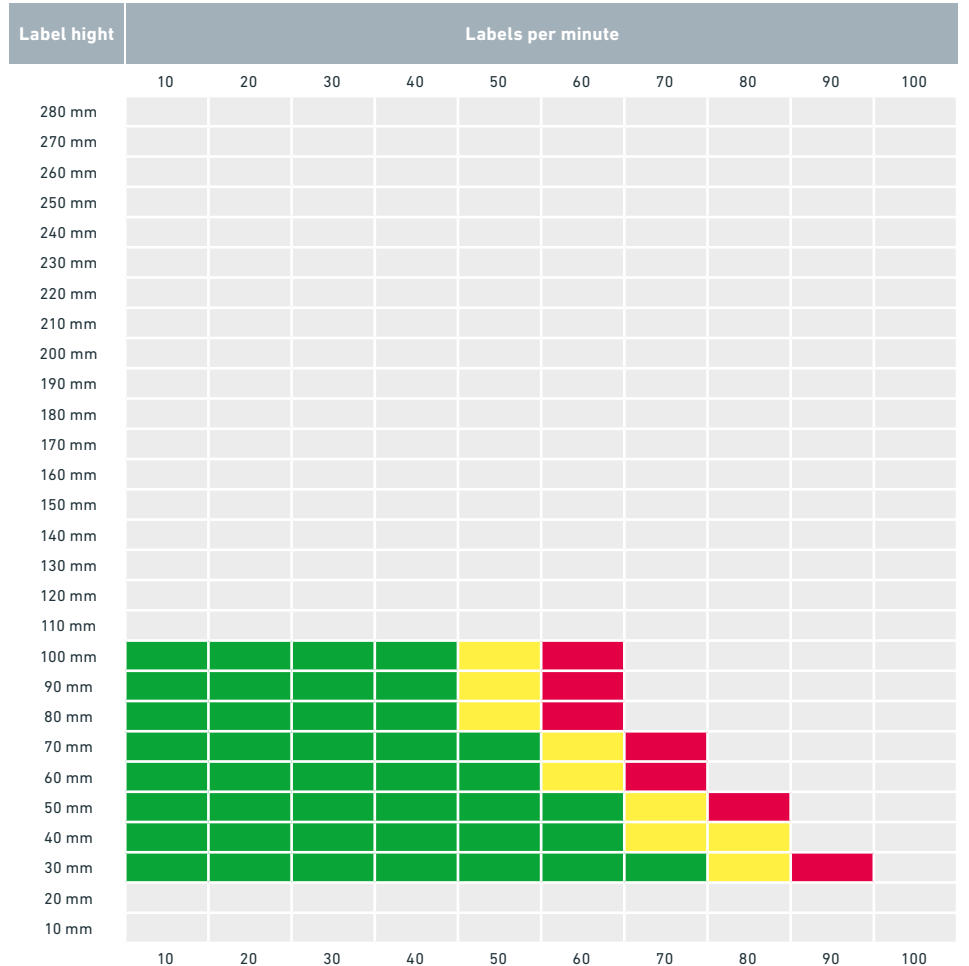

Standard Advance High speed

Orientation

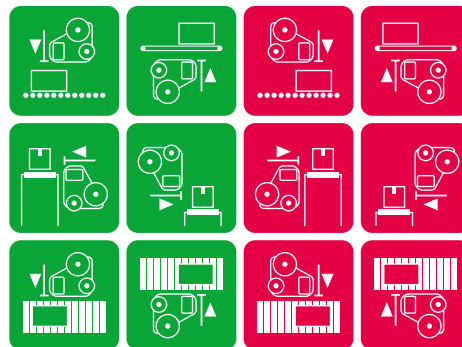

Operating side right Operating side left
not available

Machine compatibility to series

100	300	400	500	700	800	900
✓	✓	✓	✓	-	-	✓
R/L	R/L	R/L	R/L	R/L	R/L	R

Application

