

Technical specifications

## LOGOMATIC Applicator | F

### Front- / rear labelling of moving products

- » Product gap control
- » Blow-on function

# LOGOMATIC Applicator | F

Applicator with swing arm for front- or rear-side labelling while products are moving.

## Label format

- » Min.: 35 × 30 mm (W × H)
- » Max.: 165 × 155 mm (W × H)
- » Other formats upon request!

## Applicator

- » Labelling of moving products
- » Realtime labelling: no printed labels in between
- » Up to 50 labels / min
- » Suitable for primary- and secondary labelling

## Net stroke (F)

- » Standard: 250 mm
- » Min.: 100 mm
- » Max.: 400 mm

## Net stroke (F) Series 300

- » Standard: 300 mm


## Standard functions

- » Integrated position sensors
- » Flow control valve for fine adjustment
- » Compressed air monitoring
- » Vacuum monitoring

## Options

- » Vericoder for verification according ISO-norm
- » Scanner for barcode validation
- » Product sensor

## Orientation

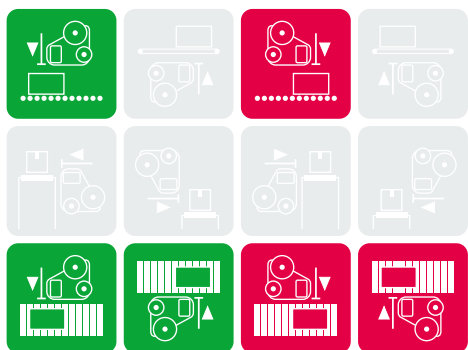


■ Operating side right 
 ■ Operating side left  
■ not available

## Machine compatibility to series

	100	300	400	500	700	800	900
	-	-	-	-	-	✓	✓
	R/L	R/L	R/L	R/L	R/L	R/L	R

## Application

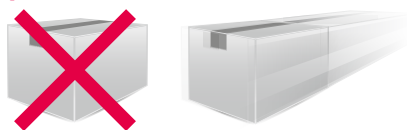

## Cycle rate with standard stroke



■ Standard 
 ■ Advance 
 ■ High speed