



Technical specifications

LOGOMATIC Applicator | P3

Worldwide standard according to GS1+

- » 3-side pallet labelling
- » Two-stop labelling solution

LOGOMATIC Applicator | P3

Telescope applicator for 3-side pallet labelling. For front-, side- and rear labelling (0°, +90° and -90°) according to GS1+ with two stops only.

Label format

- » Min.: 100 × 150 mm (W × H)
- » Max.: 150 × 210 mm (W × H)
- » Other formats upon request!

Applicator

- » Labelling of stopped products
- » Realtime labelling: no printed labels in between
- » Up to 120 labels/h
- » Suitable for tertiary- and pallet labelling

Net stroke (P)

- » Standard: 400 mm
- » Min.: 300 mm
- » Max.: 700 mm


Standard functions

- » Integrated position sensors
- » Adjustable stroke limiter
- » Flow control valve for fine adjustment
- » External signal telescope-home position
- » Compressed air monitoring
- » Vacuum monitoring


Options

- » Flexo-pad
- » 4x additional pressing stroke integrated in vacuum pad
- » Vericoder for verification according ISO-norm
- » Scanner for barcode validation
- » Product sensor

Cycle rate with standard stroke

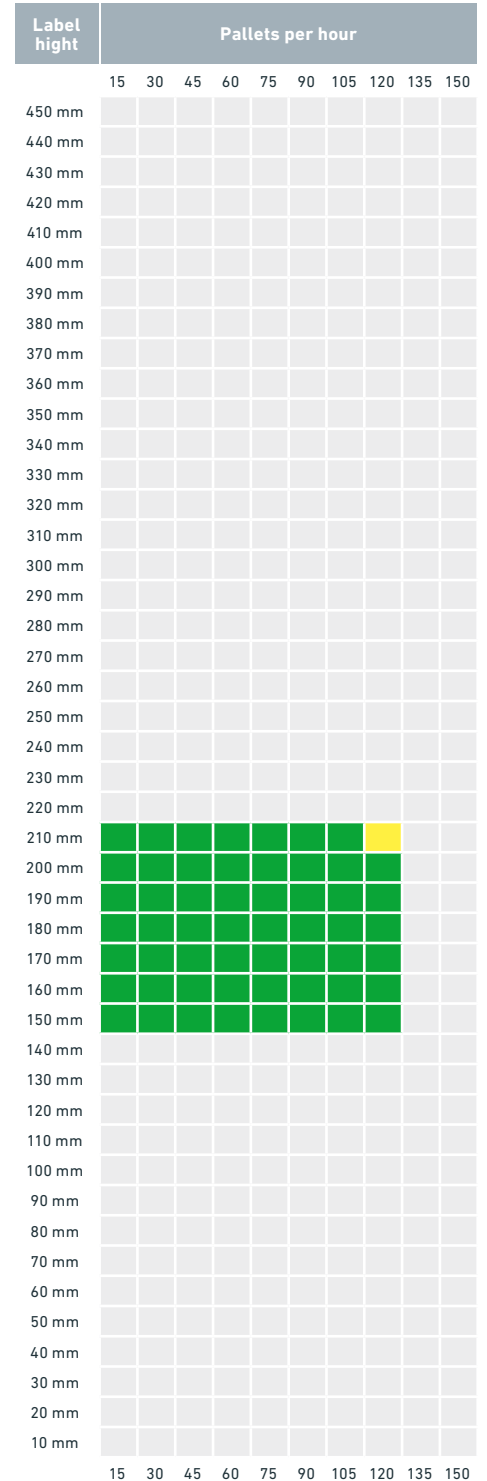

Orientation

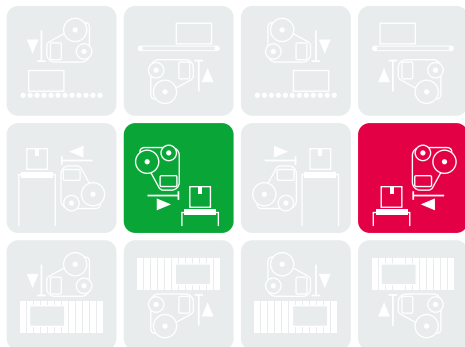


■ Operating side right
 ■ Operating side left
■ not available

Machine compatibility to series

| | 100 | 300 | 400 | 500 | 700 | 800 | 900 |
|--|-----|-----|-----|-----|-----|-----|-----|
| | - | - | - | - | - | ✓ | ✓ |
| | R/L | R/L | R | R/L | R/L | R/L | R |

Application

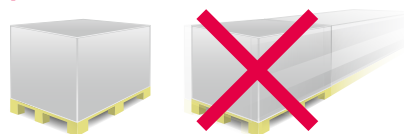

■ Standard
 ■ Advance
 ■ High speed