



Technical specifications

LOGOMATIC Applicator | B90

High speed Applicator

- » For fast application
- » Blow-on function

LOGOMATIC Applicator | B90

High-Speed blow-on applicator with bulged dispensing edge for application of labels in running condition with small distance to the product (approx. 20 mm).

Label format

- » Min.: 35 × 30 mm (W × H)
- » Max.: 110 × 105 mm (W × H)
- » Other formats upon request!

Applicator

- » Labelling in moving condition or while product is stopped
- » Batch labelling: printed labels in between
- » Up to 110 labels / min
- » Suitable for primary- and secondary labelling

Standard functions

- » Integrated position sensors
- » Flow control valve for fine adjustment
- » Compressed air monitoring
- » Vacuum monitoring


Options

- » Scanner for barcode validation
- » Product sensor
- » Passive sponge roller

Cycle rate with standard stroke



Orientation

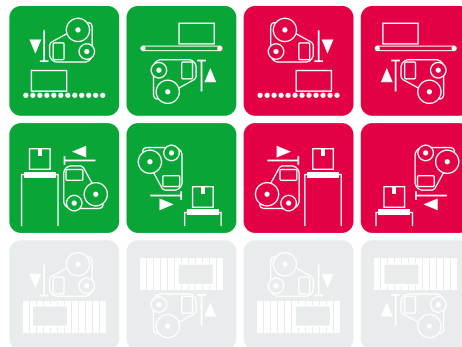

■ Operating side right ■ Operating side left
■ not available

Machine compatibility to series

	100	300	400	500	700	800	900
✓	✓	-	✓	✓	-	-	✓
R/L	R/L	R/L	R/L	R/L	R/L	R/L	R

Application

