

Technical specifications

LOGOMATIC Applicator | 715 PF

Worldwide standard according to GS1

- » 2-side pallet labelling
- » Suitable for harsh environments

LOGOMATIC Applicator | 715 PF

Telescope applicator for 2-side pallet labelling. For front- and side labelling (0° and 90°) according to GS1.

Label format

- » Standard: 148 × 210 mm (W × H)
- » Optional: 105 × 148 mm (W × H)
- » Optional: 148 × 105 mm (W × H), without scanner
- » Other formats on request!
- » Right and left version

Applicator

- » Labelling of stopped products
- » Realtime labelling: no printed labels in between
- » Up to 120 pallets/h
- » Suitable for tertiary-/ pallet labelling

Net stroke (P)

- » Standard: 600 mm
- » Min.: 300 mm
- » Max.: 600 mm

Net stroke (F)

- » Standard: 200 mm


Standard functions

- » Integrated position sensors
- » Adjustable stroke limiter
- » Flow control valve for fine adjustment
- » External signal telescope-home position
- » Compressed air monitoring
- » Vacuum monitoring to ensure

Options

- » Flexo-pad
- » Scanner for barcode validation

Orientation

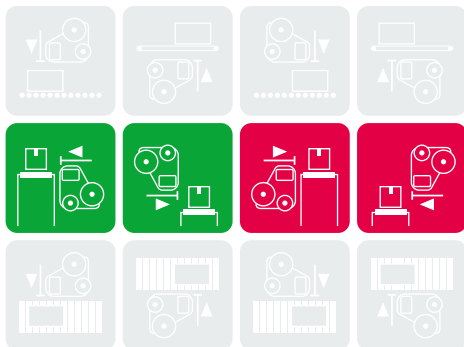


■ Operating side right
 ■ Operating side left
 ■ not available

Machine compatibility to series

100	300	400	500	700	800	900
-	-	-	-	✓	-	-
R/L	R/L	R/L	R/L	R/L	R/L	R

Application

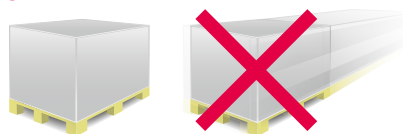

Cycle rate with standard stroke

Höhe Etikett	Paletten pro Stunde																				
	15	30	45	60	75	90	105	120	135	150	15	30	45	60	75	90	105	120	135	150	
450 mm																					
440 mm																					
430 mm																					
420 mm																					
410 mm																					
400 mm																					
390 mm																					
380 mm																					
370 mm																					
360 mm																					
350 mm																					
340 mm																					
330 mm																					
320 mm																					
310 mm																					
300 mm																					
290 mm																					
280 mm																					
270 mm																					
260 mm																					
250 mm																					
240 mm																					
230 mm																					
220 mm																					
210 mm																					
200 mm																					
190 mm																					
180 mm																					
170 mm																					
160 mm																					
150 mm																					
140 mm																					
130 mm																					
120 mm																					
110 mm																					
100 mm																					
90 mm																					
80 mm																					
70 mm																					
60 mm																					
50 mm																					
40 mm																					
30 mm																					
20 mm																					
10 mm																					

■ Standard
 ■ Advance
 ■ High speed