



Technical specifications

## LOGOMATIC Applicator | R

### The fast one

- » Rotation-applicator
- » Blow-on unit for non-contact application

# LOGOMATIC Applicator | R

Rotation applicator for fast production lines with moving product condition. Blow-on labelling with no contact of product.

## Label format

- » Min.: 35 × 35 mm (W × H)
- » Max.: 100 × 50 mm (W × H)
- » Other formats upon request!

## Applicator

- » Labelling in moving condition or while product is stopped
- » Realtime labelling: no printed labels in between
- » Up to 150 labels / min
- » Suitable for primary- and secondary labelling

## Standard functions

- » Integrated position sensors
- » Flow control valve for fine adjustment
- » Compressed air monitoring
- » Vacuum monitoring


## Options

- » Scanner for barcode validation
- » Product sensor
- » Passive sponge roller

## Cycle rate with standard stroke



## Orientation

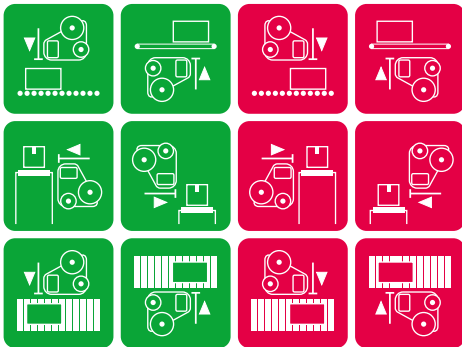

■ Operating side right 
 ■ Operating side left  
■ not available

## Machine compatibility to series

100	300	400	500	700	800	900
-	-	✓	✓	-	-	✓
R/L	R/L	R/L	R/L	R/L	R/L	R

## Application



■ Standard 
 ■ Advance 
 ■ High speed