



Technical specifications

LOGOMATIC Applicator | PSCK

Worldwide GS1 norm for reuseable products

- » Application on tying cord
- » Suitable for harsh environments

LOGOMATIC Applicator | PSCK

Pallet-cord applicator for full automatic labelling of reusable container at pallet-tyer.
With integrated cutter for Linerless label material.

Label format

- » Min.: 100 × 150 mm (W × H)
- » Max.: 150 × 210 mm (W × H)
- » Other formats upon request!

Applicator

- » Labelling of stopped products
- » Realtime labelling: no printed labels in between
- » Up to 120 pallets/h (1 label)
- » Up to 90 pallets/h (2 labels)
- » Up to 70 pallets/h (3 labels)
- » Suitable for tertiary- and pallet labelling

Net stroke (PSCK)

- » Standard: 350 mm
- » Min.: 100 mm
- » Max.: 550 mm

Standard functions

- » Support frame
- » Manual height adjustment
- » Integrated cutter
- » Integrated position sensors
- » Adjustable stroke limiter
- » Flow control valve for fine adjustment
- » External signal telescope-home position
- » Compressed air monitoring
- » Vacuum monitoring


Options

- » Stainless steel and special colours
- » Adjustable cooling- or heating systems
- » Safety-cord guide passive / active
- » Vericoder for verification according ISO-norm
- » Scanner for barcode validation
- » Product sensor

Cycle rate with standard stroke

Label height	Pallets per hour										
	15	30	45	60	75	90	105	120	135	150	
450 mm											
440 mm											
430 mm											
420 mm											
410 mm											
400 mm											
390 mm											
380 mm											
370 mm											
360 mm											
350 mm											
340 mm											
330 mm											
320 mm											
310 mm											
300 mm											
290 mm											
280 mm											
270 mm											
260 mm											
250 mm											
240 mm											
230 mm											
220 mm											
210 mm											
200 mm											
190 mm											
180 mm											
170 mm											
160 mm											
150 mm											
140 mm											
130 mm											
120 mm											
110 mm											
100 mm											
90 mm											
80 mm											
70 mm											
60 mm											
50 mm											
40 mm											
30 mm											
20 mm											
10 mm											

Orientation

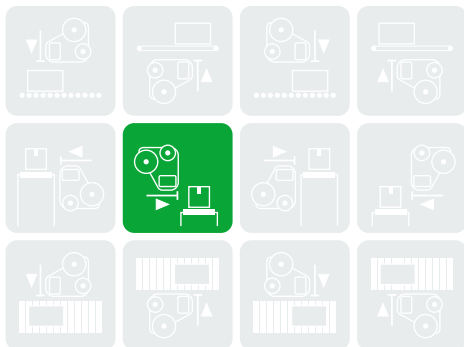


■ Operating side right
 ■ Operating side left
 not available

Machine compatibility to series

	100	300	400	500	700	800	900
	-	-	-	-	-	-	✓
	R/L	R/L	R	R/L	R/L	R/L	R

Application

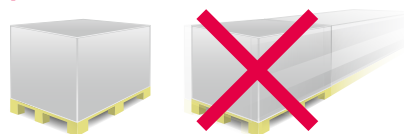

■ Standard
 ■ Advance
 ■ High speed