



Technical specifications

## LOGOMATIC Applicator | PG

### For large curved surfaces

- » Suitable for harsh environments
- » Extreme robust design

# LOGOMATIC Applicator | PG

Telescope applicator with flexible straps to apply large labels on round surfaces in product stop condition.

## Label format

- » Min.: 74 × 74 mm (W × H)
- » Max.: 300 × 420 mm (W × H)
- » Other formats upon request!

## Applicator

- » Labelling of stopped products
- » Realtime labelling: no printed labels in between
- » Up to 300 labels/h
- » Suitable for tertiary- and pallet labelling

## Net stroke (P)

- » Standard: 500 mm
- » Min.: 100 mm
- » Max.: 1,000 mm


## Standard functions

- » Integrated position sensors
- » Adjustable stroke limiter
- » Flow control valve for fine adjustment
- » External signal telescope-home position
- » Compressed air monitoring
- » Vacuum monitoring


## Options

- » Brake-cylinder for positioning
- » Vericoder for verification according ISO-norm
- » Scanner for barcode validation
- » Product sensor

## Cycle rate with standard stroke

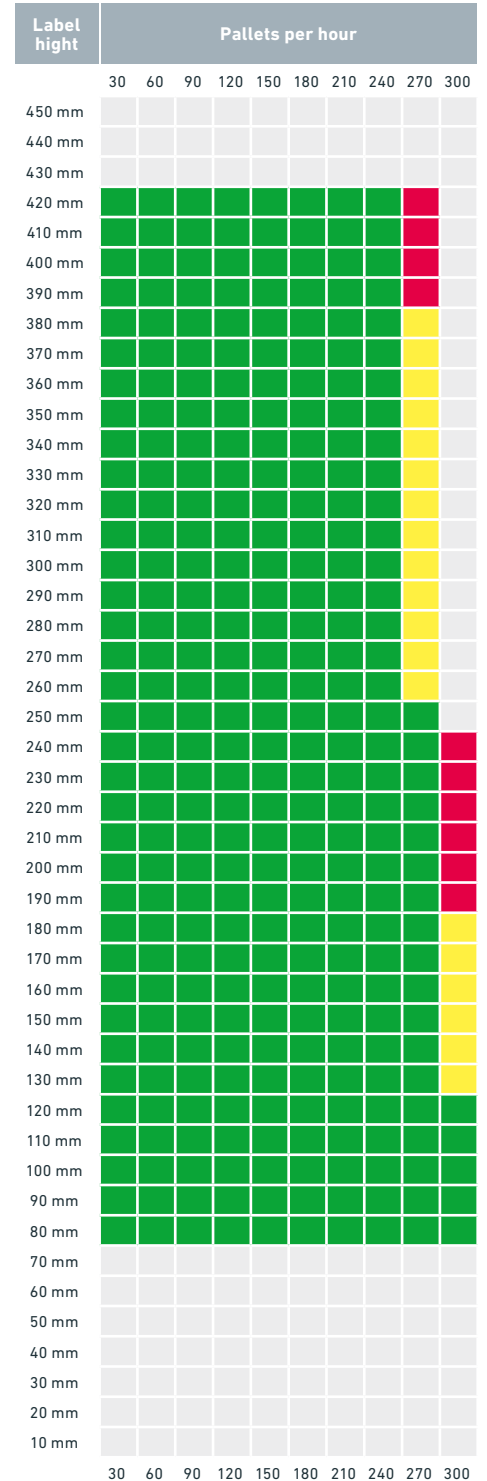

## Orientation

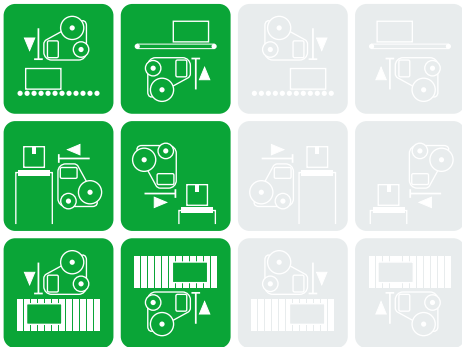


■ Operating side right 
 ■ Operating side left  
■ not available

## Machine compatibility to series

	100	300	400	500	700	800	900
	-	-	-	-	-	-	✓
	R/L	R/L	R	R/L	R/L	R/L	R

## Application

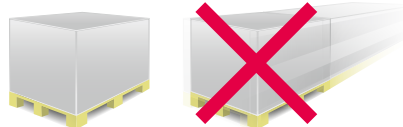

■ Standard 
 ■ Advance 
 ■ High speed